



KONE TranSys™ DX visual options

Future-proof your building with this powerful, durable connected elevator solution for moving goods in demanding environments. The KONE TranSys DX combines power with premium-quality design and can be customized with a range of materials.

Key specifications



API ready



Connected



Max. speed
1.6 m/s



Max. load capacity
5,000 kg



Max. travel
40 m



Max. floors
12



Max. persons
66




Max. group size
4




Walls

Painted steel



P51
Misty Gray
(RAL 9006)
🔗🌱




P62
Blue Reflection
🔗🌱




P63
Cottongrass White
(RAL 9003)
🔗🌱

Brushed stainless steel




F
Asturias Satin
🔗🌱

Corrosion resistant steel




A
Acid Proof
(AISI316)
🌱🔗Ⓜ




F1
Asturias Satin
(AISI304)
🌱🔗Ⓜ


Resistant stainless steel



F2
Asturias Satin
(Anti-fingerprint)
🔗🌱



K
Scottish Quad
🔗🌱



TS1
Flemish Linen
🔗🌱

Local wall



Z
Raw surface for
local paint or dec-
orative panels
🔗🌱

Smart laminate



L243
Ultimate Gray
🔗🌱

Transparent glass




TW1
Glass
🌱🔗Ⓜ

Floors

Rubber



RC30
Carbon Black
🔗🌱



RC31
Quartz Gray
🔗🌱

Metal plate



AL
Aluminium
🌱🔗Ⓜ



SS
Stainless steel
🔗🌱



ST
Chequered steel
🔗🌱

Plywood



FFP
Film Faced Ply-
wood

Local flooring



0
Raw surface for
local finishing

Doors

Painted steel



P51
Misty Gray
(RAL 9006)
🔗🌱



P63
Cottongrass White
(RAL 9003)
🔗🌱

Brushed stainless steel



F
Asturias Satin
🔗🌱

Corrosion resistant steel




A
Acid Proof
(AISI316)
🌱🔗Ⓜ




F1
Asturias Satin
(AISI304)
🌱🔗Ⓜ


Resistant stainless steel



F2
Asturias Satin
(Anti-fingerprint)
🔗🌱




K
Scottish Quad
🔗🌱



TS1
Flemish Linen
🔗🌱

Local door



Z
Raw surface for
local paint or dec-
orative panels
🔗🌱

Transparent glass



TW1
Glass
🌱🔗Ⓜ

Note:

Ⓜ Extended lead time

🌱 Nordic Swan Ecolabel: Material can be used in Nordic Swan Ecolabelled buildings.

🔗 LEED/BREEAM: Material meets LEED/BREEAM low-emitting materials requirements.

Accessories are not in scope of the requirements.

Ceilings*

Direct lighting



CL80
Finish: Cottongrass White (P63)
Asturias Satin (F)



CL96
Finish: Cottongrass White (P63)
Asturias Satin (F)

Indirect lighting



CL109
Finish: Cottongrass White (P63)
Asturias Satin (F)

Integrated ceiling



LF1 / LF1V (EN81-71 Cat.2) **
Finish: Cottongrass White (P63)
Asturias Satin (F)

Firefighter (EN81-72 compliant) and vandalt (EN81-71 compliant)



CL80V / CL80FF / CL80FFL
Finish: Cottongrass White (P63)
Asturias Satin (F)



CL96V / CL96FF / CL96FFL
Finish: Cottongrass White (P63)
Asturias Satin (F)

Handrails




HR64 - HR64TR (EN81-70)
F Asturias Satin
P70 Painted Carbon Black
(anti-bacterial treatment)
[🔗](#)



HR81 - HR81TR (EN81-70)
F Asturias Satin
P70 Painted Carbon Black
(anti-bacterial treatment)
[🔗](#)




HR94 * (EN81-70 & EN81-71 Cat.2)
F Asturias Satin
[🔗](#)



HR64TR and HR81TR
are continuous
versions

Handrail finishes



Asturias Satin (F) [🔗](#) [🔗](#)



Painted Carbon Black (P70) [🔗](#) [🔗](#)

Ceiling finishes



Asturias Satin (F) [🔗](#) [🔗](#)



Cottongrass White (P63) [🔗](#) [🔗](#)

Buffer rails



BR1
TS - Flemish Linen
[🔗](#)



PR5
Solid wood: Oak/Beech
[🔗](#)



PR6
Brushed stainless steel
[🔗](#)

Mirrors



Mirrors are available as
partial height, full width
with clear glass without
fixings

Note:

E Extended lead time

N Nordiic Swan Ecolabel: Material can be used in Nordiic Swan Ecolabelled buildings.

L LEED/BREEAM: Material meets LEED/BREEAM low-emitting materials requirements. Accessories are not in scope of the requirements.

* All ceilings available up to 2500 kg

** LF1 and LF1V are the only ceilings for cars over 4000 kg

Car operating panel (COP)







COP



KONE
Interact 10

KONE
Interact 20

Faceplate finishes

-  Asturias Satin (F)  
-  Carbon Black (CB)*  

Mounting type

COP: flush
Buttons: flush and surface (EN81-72 compliant)


COP Display



5,7" LCD**




Full graphic 7" LCD*



Full graphic 10,1" LCD*

COP lens



Black, round



Black, rectangular






Magic Mirror, round*



Magic Mirror, rectangular*

Note:

-  Extended lead time
-  Nordic Swan Ecolabel: Material can be used in Nordic Swan Ecolabelled buildings.
-  LEED/BREEAM: Material meets LEED/BREEAM low-emitting materials requirements. Accessories are not in scope of the requirements.

* Only for KONE Interact 20








** Only for KONE Interact 10

KSS 700 – Destination signalization

COP



Faceplate finishes

-  Asturias Satin (F)  
-  Carbon Black (CB)   

Mounting type

COP: flush
Button: surface

COP Display









Scrolling dot matrix (KSC 733)

KSS 140 – Vandal resistant

COP



Faceplate finishes

-  Asturias Satin (F)  
-  Scottish Quad (K)  

Mounting type

COP: flush
Button: surface


Landing devices



KSI 143



KSL 140

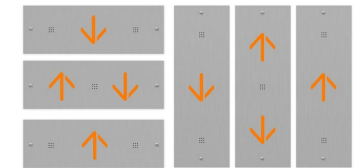

KSH 150


KSC 143PH (Partial height)
KSC 143FH (Full height)

KSS H – Accessible excellence






KSC H70, up to 12 buttons
KSC H40, up to 6 buttons

Landing devices (surface mounted)



KSL 710

Faceplate finishes

-  Asturias Satin (F)  




Note:
 E Extended lead time
 Ⓢ Nordic Swan Ecolabel: Material can be used in Nordic Swan Ecolabelled buildings.
 Ⓢ LEED/BREEAM: Material meets LEED/BREEAM low-emitting materials requirements. Accessories are not in scope of the requirements.

Landing user interface (surface mounted)

Landing call stations



Hall displays




Landing user interface (flush mounted)

Landing call stations



Faceplate finishes



Hall displays





KONE provides innovative and eco-efficient solutions for elevators, escalators, automatic building doors and the systems that integrate them with today's intelligent buildings. We support our customers every step of the way: from design, manufacturing and installation to maintenance and modernization. KONE is a global leader in managing the smooth flow of people and goods throughout buildings. This makes us a reliable partner throughout the life cycle of buildings. We are fast, flexible, and we have a well-deserved reputation as a technology leader, with such innovations as KONE 24/7 Connected Services and KONE UltraRope®. KONE employs over 63,000 dedicated experts to serve you globally and locally.

KONE Corporation

Corporate offices

Keilasatama 3
P.O. Box 7
Espoo, 02150
Finland

Tel.: +358 (0)204 75 1
Fax: +358 (0)204 75 4496

Business Identity Code: 1927400-1

This publication is for general informational purposes only and we reserve the right at any time to alter the product design and specifications. No statement in this publication shall be construed as a warranty or condition, express or implied, as to any product, its fitness for any particular purpose, merchantability, quality or representation of the terms of any purchase agreement. Minor differences between printed and actual colors may exist. KONE MonoSpace® DX, KONE EcoDisc® and People Flow® are registered trademarks of KONE Corporation. Copyright © 2024 KONE Corporation.

www.kone.com

**Dedicated to
People Flow™**